


ELE-1072C-ITS 12.1" LCD, COLOR VGA KIT INSTALLATION INSTRUCTIONS

Note: This kit replaces the 10 pin Monochrome VGA Display found in early versions of the MP Pendant's.

1. Remove the old Display and 10 pin cable. Install the new LCD Display from the back and attach the Bezel from the front using the 4 screws and nuts provided.
2. Mount the PCB-0214 on the right side of the Pendant Cabinet close to J6 on the PCB-0200. Use the vecro or screws provided to mount the rail that holds the board to the side wall. Snap the Circuit Board in place.
3. Unplug the Cable from J6 on the PCB-0200 and plug it into J2 of the PCB-0214 Board.
4. Attach the +5VDC Cable from J1 on the PCB-0214 Board to J90 on the PCB-0200.
5. Plug the supplied VGA Cable into J3 on the PCB-0214 Board and plug the other end into the LCD Display.
6. Plug the 4 pin AC Power plug in, attach the ground and you are ready to power up.

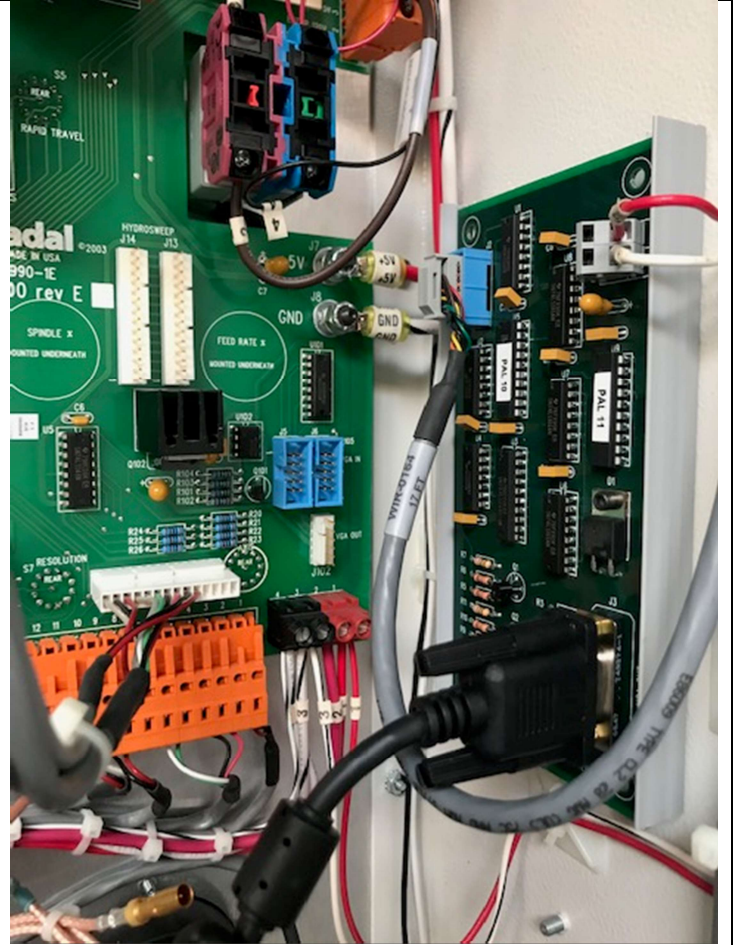

Adjustments for Contrast, Brightness, Horizontal and Vertical Position

1. On the Remote press Menu, Down Arrow then Left or Right Arrow to Adjust Contrast.
2. Press Down Arrow again and Left or right Arrow to Adjust Brightness.
3. Press Menu again and Right Arrow 3 times, then Down Arrow and Left or Right Arrow to Adjust Vertical Position.
4. Press Down Arrow again and Left or Right Arrow to Adjust Horizontal Position.
5. Press Menu again to exit.

If you have any questions call I-T-S Tech Support at 1-818-727-1887.